


# TECHNICAL DATA SHEET

## Streamline Panel

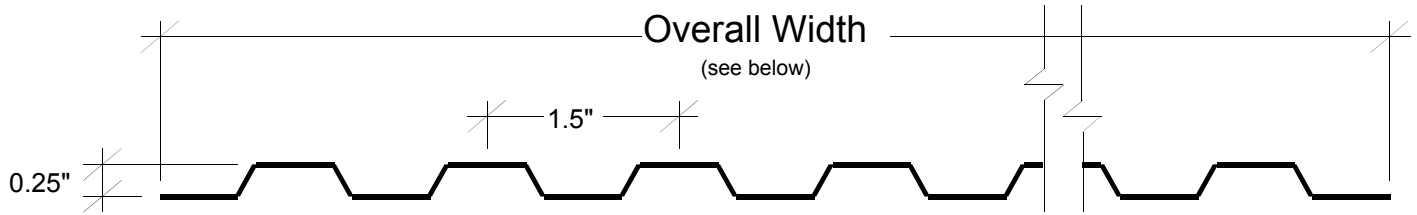

### PROFILE DIMENSIONS

	Overall Width	Coverage Width	Rib Pitch	Profile Depth	Panel Length
<b>Aluminum</b>	44.625"	43.125"	1.5"	0.25"	12" - 144"
<b>Copper</b>	33.75"	32.25"	1.5"	0.25"	12" - 144"
<b>Zinc</b>	36"	34.5"	1.5"	0.25"	12" - 144"

### LOAD SPAN TABLE

STREAMLINE	NO. SPANS	LOAD (PSF)			
		15	20	25	30
<b>Siding Allowable Span</b>					
.032" Aluminum	1	2' - 5"	2' - 2"	2' - 0"	1' - 11"
	2 & 3	3' - 1"	2' - 10"	2' - 8"	2' - 6"
.040" Aluminum	1	2' - 7"	2' - 4"	2' - 2"	2' - 1"
	2 & 3	3' - 4"	3' - 1"	2' - 10"	2' - 8"
16 oz. Copper	1	2' - 8"	2' - 5"	2' - 3"	2' - 1"
	2 & 3	3' - 6"	3' - 2"	2' - 11"	2' - 9"
.8 mm Zinc	1	2' - 7"	2' - 4"	2' - 2"	2' - 0"
	2 & 3	3' - 4"	3' - 0"	2' - 10"	2' - 8"

#### NOTE:


Maximum allowable deflection equals: Span divided by 60.

### INSTALLATION AND FASTENING GUIDELINES

Fastening Patterns for 20 psf loading:

Panel field: 10.5" o.c.

Panel side laps: 16" o.c.

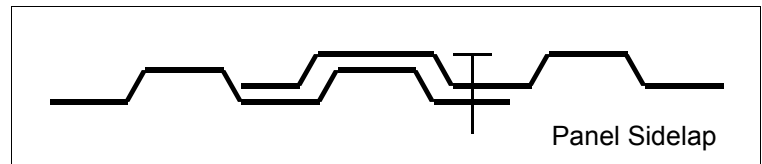

### MATERIAL SPECIFICATIONS

#### Aluminum

Alloy 3003 in compliance with the Aluminum Association Composition Specifications and conforming to ASTM B209-96. Available smooth or stucco embossed. See separate specifications for available finishes.

#### Copper

Sheets shall conform to ASTM specifications B370 or Federal Specification QQ-C-576.

#### Zinc

Sheets with pre-patina finish composed of copper-titanium zinc complying with standards NFA55-201 and BS6561A.

# LITSCO

LONG ISLAND TINSMITH SUPPLY CORP.

EST. 1918

76-11 88th STREET, GLENDALE, N.Y. 11385

(718) 846-0400 FAX (718) 846-7803

WWW.LITSCO.COM